



DL7200D-NM1

DL7200D-NH1

雙步進針送電腦平縫車

Computerized Needle Feed Lockstitch Sewing Machine with Double Stepping Motor



採用內置式直驅伺服馬達，實現了機器的快速啟動和制動的精確度；大幅度降低了噪音和振動，並降低了能耗，與普通的驅動裝置相比，電量耗減 35% 以上，適用於縫製各類襯衫、西服或類似服裝，特別是其衣領、前襟等部位，高速縫製時倒順送料針距能保持完全一致。

With built-in direct drive servo motor to achieve the accuracy of the machine's rapidstart-up and braking; a significant reduction in noise and vibration, and reduce energy consumption, compared with conventional drive unit, battery depletion of 35% or more, suitable for sewing various shirts, suits or similar garments, especially it's collar, breastand other parts, inverted send high-speed sewing material pitch to be completelyconsistent.

特點

FEATURES

完整而優良的各項細節 Complete and excellent details

本機採用連桿式針送料結構，針送料方式使送料特性更加穩定，縫層之間不易產生滑移。



The machine adopt connecting rod control feeding system, the needle feeding method make the feeding system more stable, during multi-sewing the fabric not easy to moving.

四個按鍵：
配有四個功能鍵，方便進行倒縫加固、補針（補1針，補1/2針，1/4針）操作。



Four buttons:
Equipped with four functional buttons, so that it is convenient for backstitch and stitch compensation(1 stitch, 1/2 stitch, 1/4 stitch)


黑金鋼針桿：
採用 DLC 塗層針桿，減少了頭部供油，顯著減少針桿漏油。



Needle bar made with black gold metal:
DLC coating helps to decrease the oil supply and to prevent the needle bar from oil leakage.

- 1** 步進馬達電子針距控制技術：
實現倒縫與正縫針腳高度重合。
Stepping motor electronic stitch length control:
The stitch height of reverse stitching and normal stitching are aligned.
- 2** 步進馬達雙向驅動技術 (專利技術)：
一個馬達完成切線和抬壓腳動作。
Two-way stepping motor technology(patented):
One motor completes thread trimming and presser foot lifting.
- 3** 短線頭：
採用電機驅動的雙動刀剪線機構，可在機針正下方完成剪線，縫紉後的線頭最短可達 3mm，可有效減少人工剪線的工作量。
Short thread head:
The shortest thread head is down to 3mm, which can effectively reduce workload of manual trimming.

- 4** 花樣縫：
DL7200D-NM1/NH1 可以透過設定產生 9 種不同線跡。
Pattern stitch:
DL7200D-NM1/NH1 stepping motor offers 9 different patterns.
- 5** 低噪音：
優化的機殼設計和主軸馬達結構，機器運轉時噪音低；採用步進馬達控制加固縫，加固時無聲響；採用步進馬達控制抬壓腳，壓腳提升和下降時聲音輕柔；採用步進馬達驅動切線，切線聲音大幅度降低。
Low noise:
With optimized internal design and with stepping motor without bearing, DL7200D-NM1/NH1 is quiet when reverse feeding, presser foot lifting, and trimming.
- 6** 密封油盤設計：
避免油污造成的縫料污染，同時可減小整機運作時的噪音。
Oil tank design:
Sealed oil tank to avoid fabric from grease and to reduce noise when machine operates.

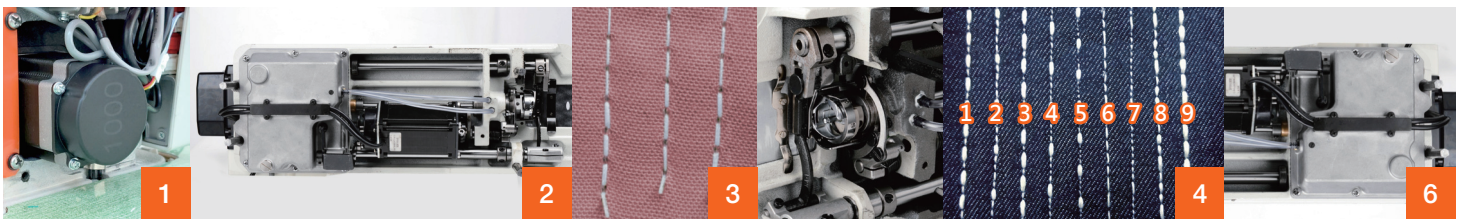

規 格 SPECIFICATIONS

DL7200D	Needle No. DB×1	布料厚度 Fabric Weight			手動 Hand	膝動 Knee	自動 Auto	mm	S.P.M. (Max)	mm	KG
		L	M	H							
NM1-16	#9 ~ #14				5.5	13	9~10	0~4.5	3500	L620 W280 H550	46 / 39.8
NH1-16	#18 ~ #21										

功能 Function	代碼 Function Code	自動切線 Auto Trimming	倒縫 Reverse Feeding	電子夾線 Thread Gripper	自動抬壓腳 Auto Lifter	防鳥巢 Bird Nest Prevention
	16	V	V	V	V	-