



TWO NEEDLE LOCKSTITCH MACHINE

DT828L

-

42

-

064

M

/


C

①機種別 Model

DT828 直驅雙針平縫車
Direct Drive Double
Needle Lockstitch
Sewing Machine

DT828L 雙步進雙針電腦平縫車
Computerized Double
Needle Lockstitch Sewing
Machine with Double
Stepping Motor

③針距 Needle Gauge



No.	mm	inch
032	3.2	1/8"
048	4.8	3/16"
064	6.4	1/4"

④車縫布料 Sewing Material

M 中厚布料
Medium

H 厚布料
Heavy

⑤自動切線 Auto Thread Trimmer


	機型 Machine Series	撥線 Thread Wiper	自動抬壓腳 Auto Lifer
C-13	DT828L	V	V

②功能 Function

規格 Sub-Class	針送 Needle Feed	標準旋梭 Standard Hook	大旋梭 Big Hook	倒縫 Reverse Feeding	角縫 Split Needle Bar
42	V	V	-	V	-
45	V	V	-	V	V
72	V	-	V	V	-
75	V	-	V	V	V


DT828

FEATURES

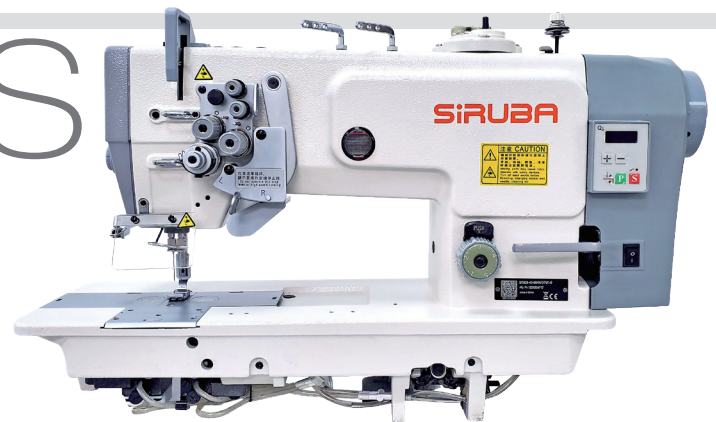

DT828 直驅雙針平縫車 Direct Drive Double Needle Lockstitch Sewing Machine

- 針送式送料，縫目準確，並可自由調整大小，縫目穩定美觀。
- 採用旋轉水平式旋梭，並附自動給油裝置。
- 附有檢視底線用的窗口，方便查看梭仔線的餘量。
- The design of needle feed mechanism moves with simple operation , excellent stitching and precise stitch-length.
- Adopting fully rotating horizontal axis hook , slide type thread take-up as well as automatically lubricating system.
- Convenient window for monitoring bobbin thread volume.



一般平縫
General plain seaming

特點

FEATURES



- 1 機電一體化的完美整合：**
內置電控箱及控制台，安裝簡易，使用方便。
Perfect mechnronic combination:
Built-in control box & panel, easy to install and operate.
- 2 直驅伺服馬達：**
反應快速，動作精準，比離合器馬達省電 60%。
Direct drive servo motor:
Quick reaction, precise movement, 60% energy saving compared to clutch motor.




3 倒縫撥桿裝置：
可以輕鬆實現倒縫縫紉。
Reverse lever:
Easy to achieve reverse.

4 縫距控制鈕：
轉動調整達到理想縫距。
Stitch length control button:
Rotate to get ideal stitch length.

5 簡易式操作面板裝置：
操作內容直觀，簡單方便。
Simple control panel:
User friendly, easy to operate.

6 邊角縫裝置：
從縫紉角度和針數決定距寬，來做到美麗之邊縫。
Split stitching device:
Decide the ideal width by sewing angle and stitches numbers, it will make good quality of split stitching.

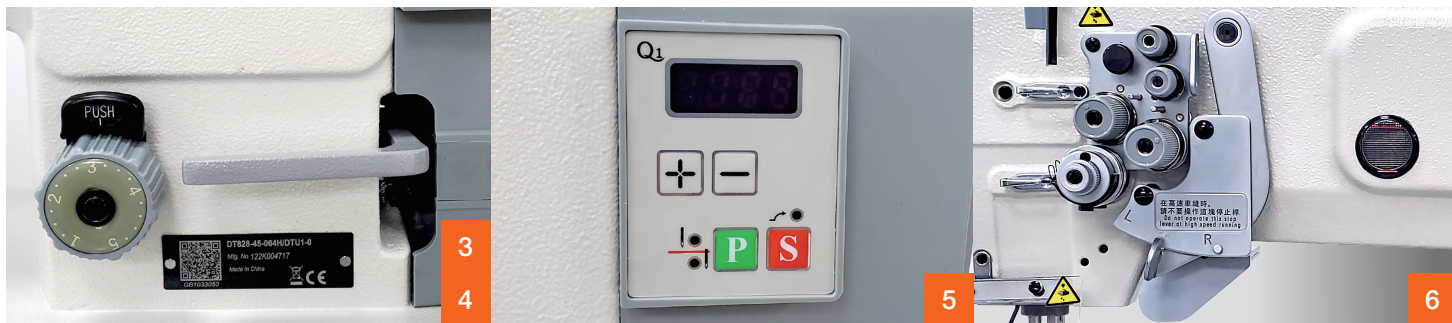

規格

SPECIFICATIONS

DT828	mm	Needle No. DP×5	布料厚度 Fabric Weight			mm	mm	S.P.M. (Max)	mm	KG
			L	M	H					
42	4.8 6.4	#14 - #22				7	M : 0~4 H : 0~5	3600	L730 W315 H670	49 / 52
45										
72								3000		
75										

功能 Function	規格 Sub-Class	針送 Needle Feed	標準旋梭 Standard Hook	大旋梭 Big Hook	角縫 Split Needle Bar
		42	V	V	-
	45	V	V	-	V
	72	V	-	V	-
	75	V	-	V	V