

# VMAS

## VMS-K3-3530

工作范围Sewing range: 350mm×280mm

## VMS-K3-5030

工作范围Sewing range: 500mm×280mm

智能缝

Intelligent Lockstitch

Máy may tự động khổ nhỏ



**平缝机自动化缝纫，精准快捷、高速运作、噪音低**

Automatic lockstitch sewing, Accurate and fast, High speed operation, Low noise

自动计件功能

Automatic piece counting function

断线自动报警功能

Automatic disconnection alarm function

底线结束报警功能

Bottom line end alarm function

电子压脚功能

Electronic presser foot function

花样机所有功能(需另购装置)

All functions of pattern machine(Need to purchase seperately)

实物应用 Real Applications



明暗线车缝  
Light and dark line stitching



明线车缝  
Light line stitching



袋盖  
Baf cover



介英  
Cuff



袋盖  
Baf cover



贴片车缝线  
Patch sewing




开袋  
Open bag



贴商标  
Label


选配装置 Optional Device




切刀装置  
Cutter device



红外线定位装置  
Infrared positioning device



侧滑装置  
Side slop device

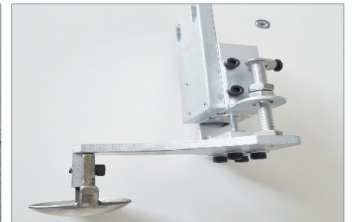

压脚装置  
Presser foot device

技术参数 Technical parameters

型号	Model	VMS-K3-3530	VMS-K3-5030
搭载机头	Machine Head	重机-DDL8000A(JUKI)	重机-DDL8000A(JUKI)
工作范围	Sewing range	350mm×280mm	500mm×280mm
功率	Power	1.5kw	1.5kw
使用电源	Power Supply	220V单相 50/60Hz (必须接地线)	220V单相 50/60Hz (必须接地线)
使用气压	Air Pressure	0.5Mpa(5kgf/cm <sup>2</sup> )	0.5Mpa(5kgf/cm <sup>2</sup> )
机针	Needle	DBX1 (8#,9#, 11#, 12#, 14#)	DBX1 (8#,9#, 11#, 12#, 14#)
针距	Pitch	0.5-6mm	0.5-6mm
压脚抬升高度	Presser foot lift height	0-13mm	0-13mm
控制系统	Control System	微电脑控制 Microcomputer control	微电脑控制 Microcomputer control
缝纫机转速	Sewing Speed	100-3200 rpm	100-3200 rpm
记忆程序数量	Number of memory programs	999	999
真空电机功率	Vacuum motor Power	1.1kg	1.1kg
机器重量	Machine weight	210kg	210kg
机器尺寸	Machine measurement	120X118X124cm	120X118X124cm