

VMAS

VMS-K3-3530S

工作范围Sewing range: 350mm×280mm

VMS-K3-5030S

工作范围Sewing range: 500mm×280mm

智能缝带吸风功能

Intelligent lockstitch with suction function

Máy may tự động khổ trung



平缝机自动化缝纫，精准快捷、高速运作、噪音低

Automatic lockstitch sewing, Accurate and fast, High speed operation, Low noise

自动计件功能

Automatic piece counting function

断线自动报警功能

Automatic disconnection alarm function

底线结束报警功能

Bottom line end alarm function

电子压脚功能

Electronic presser foot function

花样机所有功能(需另购装置)

All functions of pattern machine(Need to purchase seperately)

实物应用 Real Applications



衬衣贴袋
Shirt patch pocket



贴袋
Patch pocket



开袋 介英
Open bag Cuff



袋盖 贴袋
Baf cover Patch pocket




脚叉
The split



贴龟背
Turtle back


选配装置 Optional Device

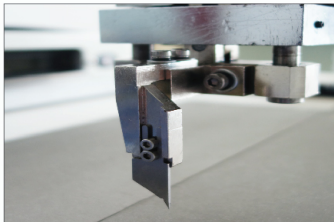


切刀装置
Cutter device



红外线定位装置
Infrared positioning device

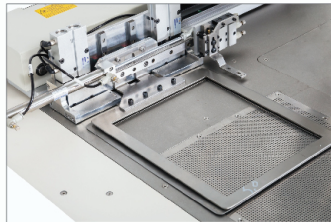

侧滑装置
Side slop device

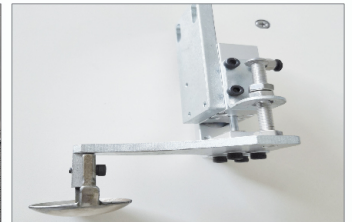

压脚装置
Presser foot device

技术参数 Technical parameters

| | | | |
|--------|--------------------------------|-------------------------------|-------------------------------|
| 型号 | Model | VMS-K3-3530S | VMS-K3-5030S |
| 搭载机头 | Head | 重机-DDL8000A(JUKI) | 重机-DDL8000A(JUKI) |
| 工作范围 | The scope of work | 350mm×280mm | 500mm×280mm |
| 功率 | Power | 1.5kw | 1.5kw |
| 使用电源 | Electric | 220V单相 50/60Hz (必须接地线) | 220V单相 50/60Hz (必须接地线) |
| 使用气压 | Air pressure | 0.5Mpa(5kgf/cm ²) | 0.5Mpa(5kgf/cm ²) |
| 机针 | Needle | DBX1 (8#,9#, 11#, 12#, 14#) | DBX1 (8#,9#, 11#, 12#, 14#) |
| 针距 | Needle gauge | 0.5-6mm | 0.5-6mm |
| 压脚抬升高度 | Lifting height of presser foot | 0-13mm | 0-13mm |
| 控制系统 | Control system | 微电脑控制 Microcomputer control | 微电脑控制 Microcomputer control |
| 缝纫机转速 | Sewing speed | 100-3200 rpm | 100-3200 rpm |
| 记忆程序数量 | Number of memory programs | 999 | 999 |
| 真空电机功率 | Vacuum motor power | 1.1kg | 1.1kg |
| 机器重量 | Machine Weight | 210kg | 210kg |
| 机器尺寸 | Machine size | 120X118X124cm | 120X118X124cm |