

03 IRONER KR




Ironer

The newest calender type

- Can be extended according to working volumn
- Wide and sturdy belt with high-strength clipper Lacing
- With stainless steel prevent corrosion, modification, crack, minimize the cost and loss
- Wide belt reliably transfer the sheet, minimize the sheet to be jammed or curled




1. Applied Stainless Steel(SUS)
Applied Stainless Steel with high thermal conductivity, achieved energy saving, sanitation and easy maintenance

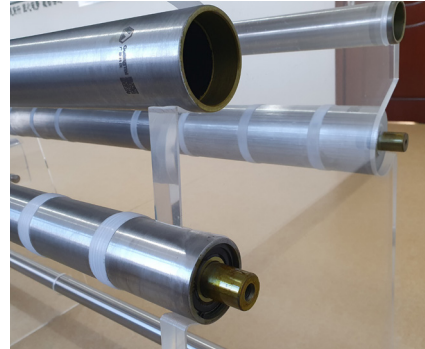

2. Stainless Roller
Fully applied Stainless Roller for Clean Operation



3. Self-Production
Made by 100% domestic technology, strong and solid

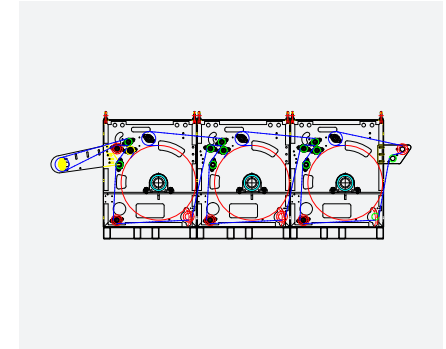

4. Self-Design
95% high-efficiency design, improved the performance

Ver. 2019

| SPECIFICATION | | | | | MOTER (kw/HP) | | | ROLLER | | | SPEED | PIPE | | | | | SIZE | | |
|---------------|--------|--------|-------|--------------|---------------|----------|------------------|----------|--------|--------|-------|------|-----|--------|-----|------|-------|--------|--------|
| MODEL | Length | Weight | Roll | Main Bearing | MOTER | Inverter | Electric Current | Diameter | Length | Volume | Sheet | IN | OUT | Steam | Air | year | Width | Length | Height |
| UNIT | mm | kg | Ø | NO | kw | HP | V/P | Ø | mm | mm | m/min | mm | mm | kg/cm2 | mm | mm | mm | mm | mm |
| KR-802 | 3000 | 2200 | 800 Ø | | 3.5 | 5 | 380/4 | 800 Ø | 3000 | 171 | 0~40 | 32 | 32 | 4~6 | 8 | -- | 4200 | 2800 | 1400 |
| KR-832 | 3300 | 2400 | 800 Ø | | 3.5 | 5 | 380/4 | 800 Ø | 3300 | 317 | 0~40 | 32 | 32 | 4~6 | 8 | -- | 4500 | 2800 | 1400 |
| KR-803 | 3000 | 3600 | 800 Ø | | 5 | 7 | 380/4 | 800 Ø | 3000 | 510 | 0~50 | 40 | 40 | 4~6 | 8 | -- | 4200 | 4200 | 1400 |
| KR-833 | 3300 | 3800 | 800 Ø | | 5 | 7 | 380/4 | 800 Ø | 3300 | 813 | 0~50 | 40 | 40 | 4~6 | 8 | -- | 4500 | 4200 | 1400 |
| KR-804 | 3000 | 4200 | 800 Ø | | 7.5 | 10 | 380/4 | 800 Ø | 3000 | 1061 | 0~70 | 40 | 40 | 4~6 | 8 | -- | 4200 | 5300 | 1400 |
| KR-834 | 3300 | 4600 | 800 Ø | | 7.5 | 10 | 380/4 | 800 Ø | 3300 | 1150 | 0~70 | 40 | 40 | 4~6 | 8 | -- | 4500 | 5300 | 1400 |

* This specification is subject to change without notice based on product development