


MH-61

热风机

Hot Air Seam Sealing Machine

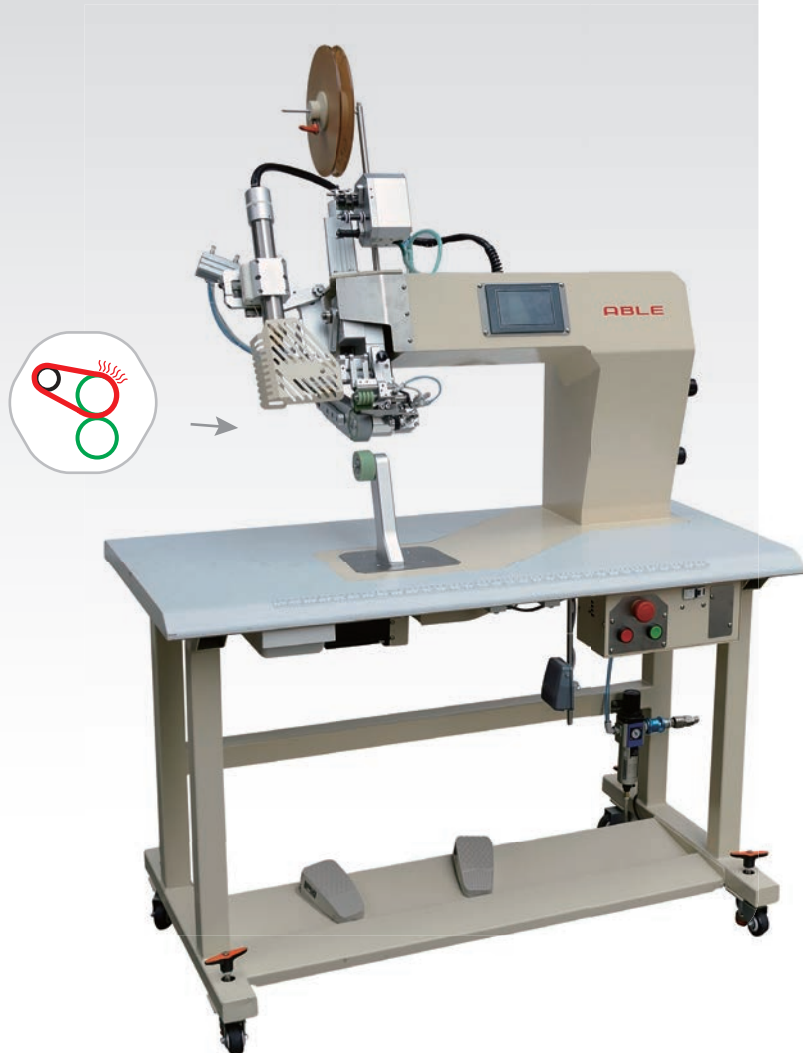

特性 / Description:

- 1、创新上皮带加热设计，停机位无需补压
- 2、上皮带轮加热有效减少带头、尾打折现象
- 3、上下轮不同速度调节适用于不同弹性物料
- 4、贴合程序分段（带头，带中，带尾）设置参数更灵活
- 5、智能送带机构，胶条贴合更平顺，针对弹性物料可灵活控制尺寸
- 6、复合式风嘴运动轨迹让胶条起头和中间停机过程中，受温更平均，产品更优质
- 7、全新外观设计，操作空间更广阔
- 8、PLC编程控制系统，操作简单稳定

1. Innovative upper heating belt design, no need to re-press the parking stand
2. Upper belt heating reduces the tape start and ending folding effectively
3. Independent speed control for upper and lower rollers (suiting for different elastic materials).
4. Multiple sealing programs (tape start, middle and ending), provide more convenient operation options.
5. Intelligent tape feeding mechanism makes tape sealing more smooth and pinpoint at elastic fabric elongate problems.
6. Sophisticated X/Y axis complex air nozzle track movement during different sealing process (tape leading, intermittent pause, etc.), provides more even temperature control and better quality.
7. Brilliant outlook and working design provides a broad operating area.
8. PLC programming control system makes operation more easy and stable.

技术参数 / Specifications:

电压: AC 220V 50/60Hz	Power Supply: AC 220V 50/60Hz
气压: > 0.4 MPa	Air Pressure: > 0.4 MPa
功率: 3600W	Power Consumption: 3600W
最大速度: 60ft/min	Max. Speed: 60ft/min
风嘴宽度:10-30mm, 标配 :22mm	Nozzle Width: 10-30mm, Standard: 22mm
外形尺寸: 1200(L)*655(W)*1700(H)mm	Dimension: 1200(L)*655(W)*1700(H)mm
净重: 110kg	Net Weight: 110kg

